


Micro Driver 100W 24V Power Supply

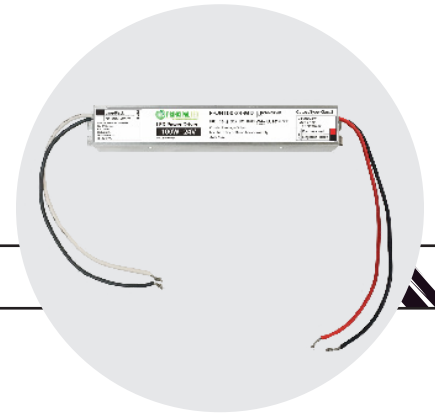

PART

Part Number
P-OH100-24-MD

PERFORMANCE

Input Voltage	120~277 VAC
Input Current	0.9 @ 120VAC, 0.39 @ 277VAC
Input Frequency	50/60 Hz
Power Factor	0.9 min.
Output Voltage	DC24V
Output Current	0-4.0A
Output Power	100W max.

PHYSICAL

Length	8.46 in. (21.5 cm)
Width	1.32 in. (3.35 cm)
Height	0.79 in. (2.02 cm)
Mounting Length	8.9 in. (22.6 cm)
Weight	0.57 lbs. (0.26Kg)
Lead Lengths	7.87 in. (20 cm)
Output Wire Color	+ Solid Red / - Solid Black

ORDERING GUIDE

P	O	H	100	24	MD
Power Supplies	Outdoor, Direct-wire	120-277 VAC	Max. 100W	24VDC Output	Micro Driver

FEATURES

- Universal input voltage 120 ~ 277 VAC
- Aluminum shell, silicone potted
- 100% full load burn-in tested
- Dry or Damp Locations Rated

SAFETY

Over Current Protection	>100%
Short Circuit Protection	Hiccup mode, auto recover
Other Protection	Over Voltage/Over Load/Short Circuit
UL	UL879 / UL8750 CSA C22.2 NO. 207-M89
CE-LVD	EN61347-1:2008+A1:2011+A2:2013 EN61347-2-13:2014

ENVIRONMENTAL

CE-EMC	EN55015, EN61527, EN61000
FCC	FCC 47 CFR PART 15, CLASS 2
IP Rating	IP66
Operating Temperature	-30°C to 50°C (-22°F to 122°F)
Storage Temperature	-40°C to 80°C (-40°F to 176°F)
Relative Humidity	20-95% RH



www.p-led.com • 325-227-4577 • sales@p-led.com



REV20211007
Data subject to changes.